



# ACUS 1.1

ACUS 1.1 25W 40° 2700K 700mA HC

Cod: **ACU01CCL200Z00**



## IdroSkud® protection system

- polarity reversal protection
- voltage spikes protection
- water infiltration protection



## Protection class III

Designed to be supplied from a separated extra-low voltage (SELV) power supply



## IP 66

Protected against powerful power jets, 100 liters per minute



## IP 67

Protected against temporary immersion (30 minutes) up to 1 meter



## IK 10

Protected against impact of 20 J



## High temperatures

Design to withstand temperatures up to +50° C



## Driver-over

Fixture design to withstand a static load up to 20 kN



## CX - Extreme

corrosion resistance level ISO 9223



## Mizar warranty

5 years warranty



## Technical description

Inground luminaire, drive-over, suitable for outdoor environments (IP66/IP67), with operating temperature range: -20°C / +50°C. To reduce weight and ensure corrosion resistance, the body is made of aluminum and the round frame of steel. The light source is LED C.O.B powered by constant current, max 700mA, for maximum power of 25W. The high luminous flux makes it ideal for marking pedestrian and driveway paths or illuminating facades and architectural details thanks to the optics with reflector. The LED source is recessed for greater visual comfort. Color rendering index CRI > 90. Acus is equipped with IdroSkud® system to protect electronic components from voltage spikes, polarity reversal and water infiltration. There are optionals for anti-glare (honeycomb and louvre) and installation accessories (drive-over outercase). The product must be combined with a power supply to ensure its operation. The power supply must be ordered separately. The amount of luminaires that can be connected to a single power supply varies depending on the type of installation. It is up to the installer to verify the possible voltage drop by evaluating the distance between the product and the power supply.

## Lighting data

|                             |         |                      |                                                                                  |
|-----------------------------|---------|----------------------|----------------------------------------------------------------------------------|
| Source type                 | COB LED | Photobiological risk | RG0                                                                              |
| CCT                         | 2700K   | ULR                  | 100.00%                                                                          |
| CRI                         | > 90    | BUG Rating           | B0 U5 G0                                                                         |
| MacAdam (SDCM)              | 3       | CIE Flux Code        | 0 0 0 0 100                                                                      |
| Source lumen output (lm)    | 2695    | LED lifetime         | L80 B10 50.000h                                                                  |
| Luminaire lumen output (lm) | 2076    | Efficiency class     | This product contains a light source of energy efficiency class (EU2019/2015): F |
| Light emission              | Wide    |                      |                                                                                  |
| Beam angle                  | 40°     |                      |                                                                                  |


## Mechanical data

|                          |                                    |                             |                                   |
|--------------------------|------------------------------------|-----------------------------|-----------------------------------|
| Diameter (mm)            | 140                                | Diffuser thickness (mm)     | 12                                |
| Height (mm)              | 106                                | Class ISO 9223              | CX                                |
| Weight (g)               | 1300                               | Optic type                  | Technopolymer metalized reflector |
| IP Rating                | IP66 / IP67                        | Optical optional            | Honeycomb                         |
| IK rating                | IK10                               | Maximal working temperature | +50° C                            |
| Shape                    | Round                              | Minimal working temperature | -20° C                            |
| Finishing colour         | Steel                              | Maximal static load (kN)    | 20                                |
| Frame material           | Shot peened stainless steel 316L   | Walk-over                   | Yes                               |
| Body material            | Anodized aluminum anticorodal 6082 | Driver-over                 | Yes                               |
| External screws material | Stainless steel 316L (A4)          | Maximal surface temperature | +60° C                            |
| Diffuser material        | Extraclear tempered glass          | Areas EN 60598-2-13         | A1 / A2 / A3 / A4                 |

## Electrical data

|                                 |                          |                             |                   |
|---------------------------------|--------------------------|-----------------------------|-------------------|
| Nominal power (W)               | 25                       | Electrical connection       | Series connection |
| Power supply (input power type) | Costant current - 700 mA | Idroskud® protection        | Yes               |
| Ballast                         | Remote                   | Inverse polarity protection | Yes               |
| Insulation class                | III                      | Voltage spikes protection   | Yes               |
| Dimmable                        | Yes                      |                             |                   |
| Connector type                  | M12 - 5 poles IP67       |                             |                   |
| Power cable length              | Not pre-wired            |                             |                   |

## Photometry

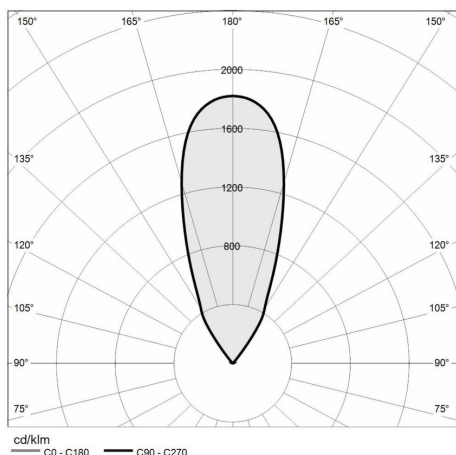

## Technical drawing



## Accessories



### DRIVE-OVER OUTERCASE

Outer case drive-over ACUS

Cod: ACUZZZ000



### NOT DIMMABLE POWER SUPPLY

POWER SUPPLY DC 5-44V 700MA 30W  
MAX

Cod: MID0022



### NOT DIMMABLE POWER SUPPLY

Power supply DC 25-85V 15/70W  
350-700mA IP20


Cod: MID0024



### DIMMABLE POWER SUPPLY

POWER SUPPLY DC 10-54V 1,5/38W  
150-1050MA IP20 DALI/NFC

Cod: MID0025



### NOT DIMMABLE POWER SUPPLY

POWER SUPPLY DC 10-50V 15/70W  
700MA IP68

Cod: MID0026



### DIMMABLE POWER SUPPLY

POWER SUPPLY DC 2-49V 1/30W  
250-700MA IP68 DALI

Cod: MID0027