



# EGEO 4.0

EGEO 4.0 7W AL ELL 3000K 24V 15M

Cod: **CEA15DCE000P00**



#### IdroSkud® protection system

- polarity reversal protection
- voltage spikes protection
- water infiltration protection



#### Protection class III

Designed to be supplied from a separated extra-low voltage (SELV) power supply



#### IP 66

Protected against powerful power jets, 100 liters per minute



#### IP 68 up to 10m

Protected against continuous immersion up to 10 meters



#### IK 09

Protected against impact of 10 J



#### High temperatures

Design to withstand temperatures up to +50° C



#### C5 - Very high

corrosion resistance level ISO 9223



#### Mizar warranty

5 years warranty



## Technical description

Floodlight suitable for outdoor and underwater environments up to 10 m (IP66/IP68), with operating temperature range: -20°C / +50°C. To offer maximum versatility of application, the body can be made of aluminum or steel; the bracket, made of steel for both models, allows the fixture's tilt to be adjusted. The light source consists of a single 7W power Led chip powered at 24V constant voltage with integrated driver. The luminous flux makes it ideal for illuminating architectural details, garden plants or water features, thanks to the different emission angles. The source is set back for greater visual comfort. Color rendering index CRI > 90. EGEO is equipped with IdroSkud® system to protect electronic components from voltage spikes, polarity reversal and water infiltration. Optional for anti-glare (honeycomb) and accessory for installation in the ground (stake) are provided. The product must be combined with a power supply to ensure its operation. The power supply must be ordered separately. The amount of luminaires that can be connected to a single power supply varies depending on the type of installation. It is up to the installer to verify the possible voltage drop by evaluating the distance between the product and the power supply.

## Lighting data

|                             |                       |
|-----------------------------|-----------------------|
| Source type                 | single chip power LED |
| CCT                         | 3000K                 |
| CRI                         | > 90                  |
| MacAdam (SDCM)              | 2                     |
| Source lumen output (lm)    | 445                   |
| Luminaire lumen output (lm) | 351                   |
| Light emission              | Elliptical            |
| Beam angle                  | 15°x60°               |

|                      |                                                                                  |
|----------------------|----------------------------------------------------------------------------------|
| Photobiological risk | RG0                                                                              |
| ULR                  | 0.00%                                                                            |
| BUG Rating           | B0 U0 G0                                                                         |
| CIE Flux Code        | 78 92 99 100 100                                                                 |
| LED lifetime         | L80 B10 50.000h                                                                  |
| Efficiency class     | This product contains a light source of energy efficiency class (EU2019/2015): G |

## Mechanical data

|                  |                                        |
|------------------|----------------------------------------|
| Width (mm)       | 86                                     |
| Length (mm)      | 114                                    |
| Height (mm)      | 117                                    |
| Weight (g)       | 748                                    |
| IP Rating        | IP66 / IP68 10m                        |
| IK rating        | IK09                                   |
| Finishing colour | Aluminium / Aluminium                  |
| Frame material   | Anodized 20u aluminum anticorodal 6082 |
| Body material    | Anodized 20u aluminum anticorodal 6082 |


|                             |                           |
|-----------------------------|---------------------------|
| External screws material    | Stainless steel 316L (A4) |
| Diffuser material           | Extraclear tempered glass |
| Diffuser thickness (mm)     | 8                         |
| Class ISO 9223              | C5                        |
| Optic type                  | Technopolymer TIR Lens    |
| Optical optional            | None                      |
| Maximal working temperature | +50° C                    |
| Minimal working temperature | -20° C                    |

## Electrical data


|                                 |                                  |
|---------------------------------|----------------------------------|
| Nominal power (W)               | 7                                |
| Power supply (input power type) | Costant voltage - 24V            |
| Ballast                         | Remote                           |
| Insulation class                | III                              |
| Dimmable                        | Yes                              |
| Power cable type                | H05RN - F 2x0,75 mm <sup>2</sup> |
| Power cable length              | 15 m (verify voltage drop)       |

|                             |                     |
|-----------------------------|---------------------|
| Electrical connection       | Parallel connection |
| Idroskud® protection        | Yes                 |
| Inverse polarity protection | Yes                 |
| Voltage spikes protection   | Yes                 |

## Photometry

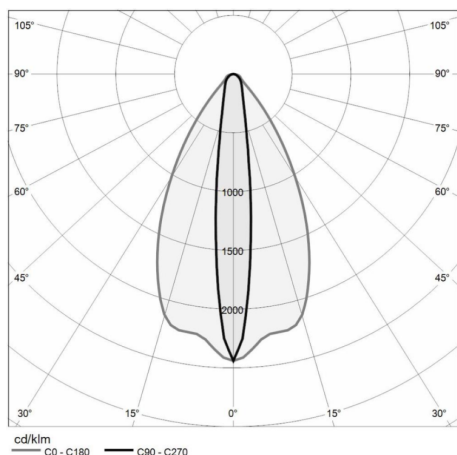

## Technical drawing

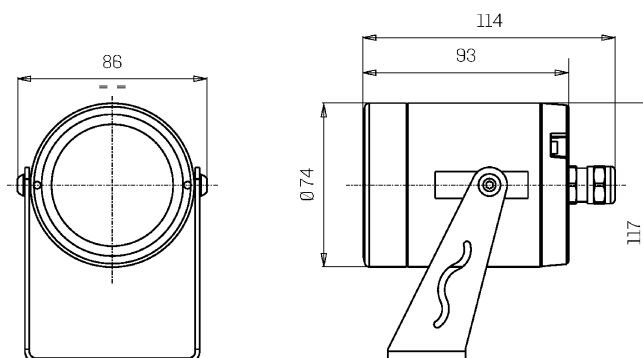

## Accessories



### GROUND STAKE

Stake for floodlight - big size

Cod: CEAZZZ017



### NOT DIMMABLE POWER SUPPLY

Power supply DC 24V 14,4W IP67  
ON/OFF

Cod: MID0019



### NOT DIMMABLE POWER SUPPLY

Power supply DC 24V 36W IP67 ON/OFF

Cod: MID0020



### DIMMABLE POWER SUPPLY

Power supply 220/240 50/60Hz 24V  
24W IP67 DALI

Cod: MID0021