



# EGEO 4.1 RGBW

EGEO 4.1 8W AL 40° RGBW 24V PWM  
1,5M

Cod: **CEA15PCL000C00**



#### IdroSkud® protection system

- polarity reversal protection
- voltage spikes protection
- water infiltration protection



#### Protection class III

Designed to be supplied from a separated extra-low voltage (SELV) power supply



#### IP 66

Protected against powerful power jets, 100 liters per minute



#### IP 68 up to 10m

Protected against continuous immersion up to 10 meters



#### IK 09

Protected against impact of 10 J



#### High temperatures

Design to withstand temperatures up to +50° C



#### C5 - Very high

corrosion resistance level ISO 9223



#### RGBW luminaire

Light source allows to mix colours controlling four channels



#### Mizar warranty

5 years warranty



## Technical description

Floodlight suitable for outdoor and underwater environments up to 10 m (IP66/IP68), with operating temperature range: -20°C / +50°C. To offer maximum versatility of application, the body can be made of aluminum or steel; the bracket, made of steel for both models, allows the fixture's tilt to be adjusted. The light source is a multi-chip LED RGBW powered by constant voltage 24V, for maximum power of 8W, paired with a specific color-mixing TIR lens. The luminous flux makes it ideal for illuminating architectural details, garden plants or water features, thanks to the different emission angles. The source is set back for greater visual comfort. Color rendering index CRI > 90. EGEO is equipped with IdroSkud® system to protect electronic components from voltage spikes, polarity reversal and water infiltration. Optional for anti-glare (honeycomb) and accessory for installation in the ground (stake) are provided. The product must be combined with a power supply to ensure its operation. The power supply must be ordered separately. The amount of luminaires that can be connected to a single power supply varies depending on the type of installation. It is up to the installer to verify the possible voltage drop by evaluating the distance between the product and the power supply.

## Lighting data

|                             |                |                      |                   |
|-----------------------------|----------------|----------------------|-------------------|
| Source type                 | multi-chip LED | Beam angle           | 40°               |
| CCT                         | RGBW (4000K)   | Photobiological risk | RG0               |
| CRI                         | > 80           | ULR                  | 100.00%           |
| MacAdam (SDCM)              | 3              | BUG Rating           | B0 U0 G0          |
| Source lumen output (lm)    | 640            | CIE Flux Code        | 95 99 100 100 100 |
| Luminaire lumen output (lm) | 336            | LED lifetime         | L80 B10 50.000h   |
| Light emission              | Wide           |                      |                   |


## Mechanical data

|                  |                                       |                                |                                       |
|------------------|---------------------------------------|--------------------------------|---------------------------------------|
| Width (mm)       | 86                                    | Body material                  | Anodized aluminum<br>anticorodal 6082 |
| Length (mm)      | 114                                   | Diffuser material              | Extraclear tempered glass             |
| Height (mm)      | 117                                   | Diffuser thickness (mm)        | 8                                     |
| Weight (g)       | 748                                   | Class ISO 9223                 | C5                                    |
| IP Rating        | IP66 / IP68 10m                       | Optic type                     | Technopolymer TIR Lens                |
| IK rating        | IK09                                  | Optical optional               | None                                  |
| Finishing colour | Aluminium                             | Maximal working<br>temperature | +50° C                                |
| Frame material   | Anodized aluminum<br>anticorodal 6082 | Minimal working temperature    | -20° C                                |

## Electrical data

|                                    |                                    |                             |                     |
|------------------------------------|------------------------------------|-----------------------------|---------------------|
| Nominal power (W)                  | 8                                  | Electrical connection       | Parallel connection |
| Power supply (input power<br>type) | Costant voltage - 24V              | Idroskud® protection        | Yes                 |
| Ballast                            | Remote                             | Inverse polarity protection | Yes                 |
| Insulation class                   | III                                | Voltage spikes protection   | Yes                 |
| Dimmable                           | Yes (PWM)                          |                             |                     |
| Power cable type                   | FR5FOEM7-AD8 6x0,5 mm <sup>2</sup> |                             |                     |
| Power cable length                 | 1,5 m                              |                             |                     |

## Photometry

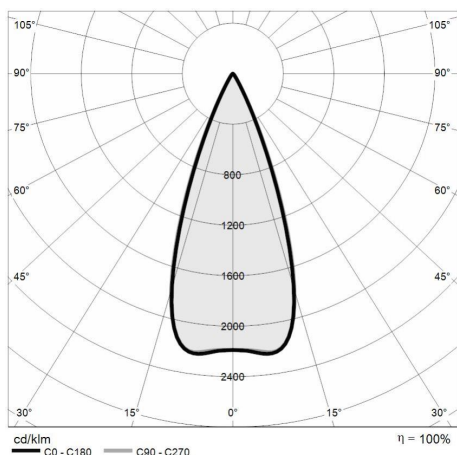

## Technical drawing



## Accessories



### GROUND STAKE

Stake for floodlight - big size

Cod: CEAZZ017



### RGBW CONTROL UNIT

Control unit WT5 5-channel RGBW PWM/WiFi

Cod: MID0023



### NOT DIMMABLE POWER SUPPLY

Power supply DC 24V 70W 2,9A IP67

Cod: MID0028



### NOT DIMMABLE POWER SUPPLY

Power supply DC 24V 150W 6,25A IP67

Cod: MID0029



### DIMMABLE POWER SUPPLY

Power supply DC 24V 120W 5A IP67 DALI2/PWM

Cod: MID0030



### DIMMABLE POWER SUPPLY

Power supply DC 24V 200W 5A IP67 DALI2/PWM

Cod: MID0031



### RGBW REMOTE

Remote control RGBW RT 1zone RF 2.4GHz

Cod: MID1000



### RGBW TOUCH PANEL

Touch wall panel RGBW 4 zone

Cod: MID1001



**NOT DIMMABLE POWER SUPPLY**

Power supply DC 24V 14,4W IP67  
ON/OFF

Cod: MID0019



**NOT DIMMABLE POWER SUPPLY**

Power supply DC 24V 36W IP67 ON/OFF

Cod: MID0020



**DIMMABLE POWER SUPPLY**

Power supply 220/240 50/60Hz 24V  
24W IP67 DALI

Cod: MID0021