



# QUANTUM TIGE 2.1

QUANTUM TIGE 2.1 900mm 7W AN7016  
60° 4000K 220V

Cod: **QUA10FCL0G0Z01**



Protection class II  
Double insulated electrical appliance



IP 65  
Protected against water jets



IK 06  
Protected against impact of 1 J



High temperatures  
Design to withstand temperatures up to +50° C




C5 - Very high  
corrosion resistance level ISO 9223



DALI  
Luminaire with dimmable power-supply integrated



Mizar warranty  
5 years warranty



## Technical description

Luminaire for ceiling mounting with rigid suspension ("tige"), suitable for outdoor environments (IP65), with wide operating temperature range: -20°C / +50°C. The extruded aluminium tige can be of different lengths and customised on request. The body is made of die-cast aluminum protected by polyester epoxy paint to ensure corrosion resistance of 1500 hours in salt spray. The light source is a single 7W Power Led chip powered by 220Vac (integrated power supply). The luminous flux and distinctive design make it ideal for illuminating terraces or walkways under porches. Color rendering index CRI > 90. Optional anti-glare (honeycomb) is provided.

## Lighting data

|                             |                       |                      |                                                                                  |
|-----------------------------|-----------------------|----------------------|----------------------------------------------------------------------------------|
| Source type                 | single chip power LED | Photobiological risk | RG0                                                                              |
| CCT                         | 4000K                 | ULR                  | 0.00%                                                                            |
| CRI                         | > 90                  | BUG Rating           | B0 U1 G0                                                                         |
| MacAdam (SDCM)              | 3                     | CIE Flux Code        | 73 91 98 100 100                                                                 |
| Source lumen output (lm)    | 445                   | LED lifetime         | L80 B10 50.000h                                                                  |
| Luminaire lumen output (lm) | 352                   | Efficiency class     | This product contains a light source of energy efficiency class (EU2019/2015): G |
| Light emission              | Wide                  |                      |                                                                                  |
| Beam angle                  | 60°                   |                      |                                                                                  |


## Mechanical data

|                   |                                                         |                             |                           |
|-------------------|---------------------------------------------------------|-----------------------------|---------------------------|
| Diameter (mm)     | 78                                                      | Diffuser material           | Extraclear tempered glass |
| Height (mm)       | 900                                                     | Diffuser thickness (mm)     | 6                         |
| Weight (g)        | 550                                                     | Class ISO 9223              | C5                        |
| IP Rating         | IP65                                                    | Optic type                  | Technopolymer TIR Lens    |
| IK rating         | IK06                                                    | Optical optional            | None                      |
| Type of finishing | Protective primer followed by epoxy and polyester paint | Maximal working temperature | +50° C                    |
| Finishing colour  | Anthracite RAL7016                                      | Minimal working temperature | -20° C                    |
| Body material     | Die-cast aluminum EN AB46100                            |                             |                           |

## Electrical data

|                                 |                  |                    |                         |
|---------------------------------|------------------|--------------------|-------------------------|
| Nominal power (W)               | 7                | Connector type     | Class II terminal block |
| Power supply (input power type) | 220V AC 50/60 Hz | Power cable length | Not pre-wired           |
| Ballast                         | Integrated       |                    |                         |
| Insulation class                | II               |                    |                         |
| Dimmable                        | Yes (DALI)       |                    |                         |

## Photometry

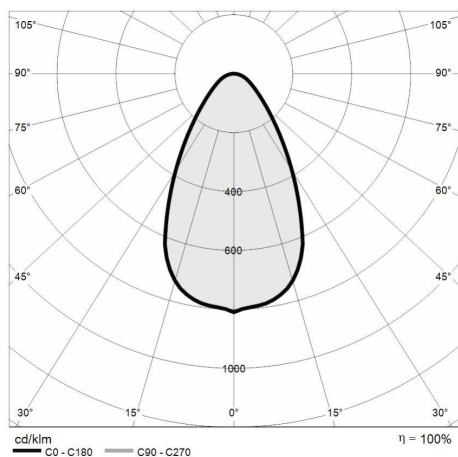

## Technical drawing

