


# VITRUM SQUARE 1.0

VITRUM SQUARE 1.0 2W BLACK 10°  
2700K 24V 10M

Cod: **VIT04CCS000M00**



**IdroSkud® protection system**  
polarity reversal protection +  
voltage spikes protection + water  
infiltration protection



**Protection class III**  
Designed to be supplied from a  
separated extra-low voltage  
(SELV) power supply



**IP 68**  
Protected against continuous  
immersion up to 3 meters



**IP 66**  
Protected against powerful power  
jets, 100 liters per minute



**IK 10**  
Protected against impact of 20 J



**High temperatures**  
Design to withstand temperatures  
up to +50° C



**Walk-over**  
Fixture design to withstand a static  
load up to 500kg



**CX - Extreme**  
corrosion resistance level ISO 9223



**Mizar warranty**  
5 years warranty



## Technical description

VITRUM is a range of completely flush-mounted ground recessed walk-over luminaires, suitable for outdoor environments (IP66/IP68) with an operating temperature range of -20°C to +50°C. Its distinctive feature is its tempered glass screen without a metal ring, silk-screened in black or white. Available in transparent or satin finish. The body is made of black anodized anticorrosional aluminum. The light source consists of a single power LED chip, in 2W, 3W, or 7W versions, powered by 24V constant voltage. The essential design makes it ideal for installation in elegant indoor and outdoor environments, as well as for high-humidity situations (spas, cellars). The light source is recessed for greater visual comfort. Color rendering index CRI > 90. The fixture is equipped with the IdroSkud® system to protect the electronic components from voltage spikes, polarity reversal, and water infiltration. The product must be combined with a power supply to ensure its operation. The power supply must be ordered separately. The number of devices that can be connected to a single power supply varies depending on the type of installation. It is the installer's responsibility to check for potential voltage drops by evaluating the distance between the product and the power supply.

## Lighting data

|                             |                       |                      |                                                                                  |
|-----------------------------|-----------------------|----------------------|----------------------------------------------------------------------------------|
| Source type                 | single chip power LED | Photobiological risk | RG0                                                                              |
| CCT                         | 2700K                 | ULR                  | 100,00%                                                                          |
| CRI                         | > 90                  | BUG Rating           | B0 U3 G0                                                                         |
| MacAdam (SDCM)              | 2                     | CIE Flux Code        | 0 0 0 0 100                                                                      |
| Source lumen output (lm)    | 157                   | LED lifetime         | L80 B10 50.000h                                                                  |
| Luminaire lumen output (lm) | 86                    | Efficiency class     | This product contains a light source of energy efficiency class (EU2019/2015): F |
| Light emission              | Narrow                |                      |                                                                                  |
| Beam angle                  | 10°                   |                      |                                                                                  |


## Mechanical data

|                         |                                    |                             |                        |
|-------------------------|------------------------------------|-----------------------------|------------------------|
| Width (mm)              | 40                                 | Class ISO 9223              | CX                     |
| Length (mm)             | 40                                 | Optic type                  | Technopolymer TIR Lens |
| Height (mm)             | 70                                 | Maximal working temperature | +50° C                 |
| Weight (Kg)             | 0.113                              | Minimal working temperature | -20° C                 |
| IP Rating               | IP66 / IP68                        | Maximum static load (kg)    | 500                    |
| IK rating               | IK10                               | Walk-over                   | Yes                    |
| Finishing colour        | Black silk-screen                  | Drive-over                  | No                     |
| Body material           | Anodized aluminum anticorodal 6082 | Maximal surface temperature | +50° C                 |
| Diffuser material       | Extraclear tempered glass          | Areas EN 60598-2-13         | A1 / A2                |
| Diffuser thickness (mm) | 8                                  |                             |                        |


## Electrical data

|                                 |                          |                             |                     |
|---------------------------------|--------------------------|-----------------------------|---------------------|
| Nominal power (W)               | 2                        | Electrical connection       | Parallel connection |
| Power supply (input power type) | Costant voltage - 24V DC | Idroskud® protection        | Yes                 |
| Ballast                         | Remote                   | Inverse polarity protection | Yes                 |
| Insulation class                | III                      | Voltage spikes protection   | Yes                 |
| Dimmable                        | Yes                      |                             |                     |
| Power cable type                | H05RN - F 2x0,75 mm²     |                             |                     |
| Power cable length              | 0,4 m                    |                             |                     |

## Photometry

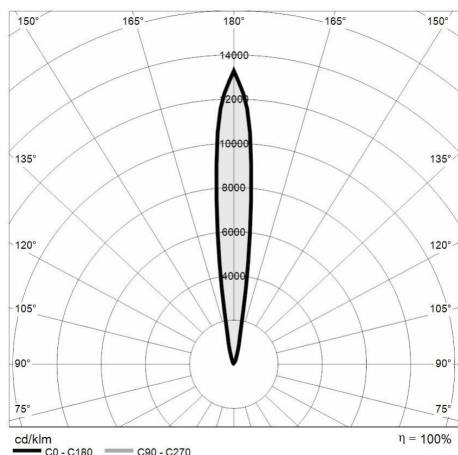

## Technical drawing

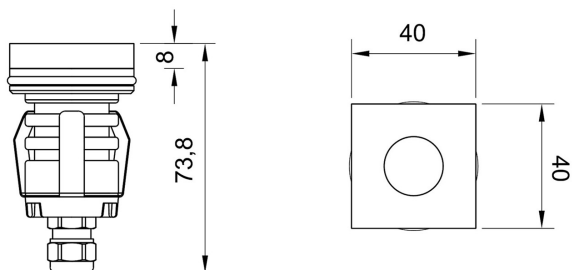

## Accessories



### NOT DIMMABLE POWER SUPPLY

Power supply DC 24V 14,4W IP67  
ON/OFF

Cod: MID0019



### NOT DIMMABLE POWER SUPPLY

Power supply DC 24V 36W IP67 ON/OFF


Cod: MID0020



### DIMMABLE POWER SUPPLY

Power supply 220/240 50/60Hz 24V  
24W IP67 DALI

Cod: MID0021



### EXTRACTION KIT

Suction cup for VITRUM 1

Cod: VITZZZ009