

Timeless design, sculpted glow,
softly lighting your way through
every space.

Mizar news

issue #26

FORMA

Forma

[ˈfòr:ma]

FORMA, the innovative modular step light designed for maximum customization. Its LED module, compatible with standard junction boxes, can be paired with a variety of die-cast finishes. In addition, the reflector, magnetically attached to the body, allows for easy customization or replacement, making FORMA a truly adaptable lighting solution.

Now FORMA is also available in two new rectangular formats, offering even more design flexibility and seamless integration into any space.




Forma 1.2



Forma 2.2






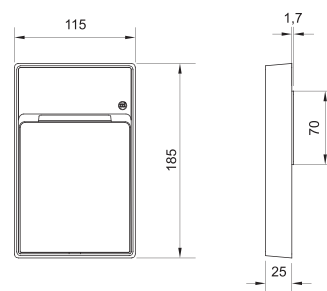


1.2

Source type	chip SMD
CCT	2700K 3000K 4000K
CRI	>90
Step MacAdam	3
Lumen output	up to 355 lm
Beam angle	A25°
Optical optional	None
Lifetime	L80 B10 50.000h
IP rating	IP65
IK rating	IK08
Type of finishing	Epoxy-polyester powder coating
Finishing colour	Anthracite RAL7016 Black RAL9005 Corten Green RAL6009 Paintable primer White RAL9003
Body material	Die-cast aluminum EN AB46100
Diffuser material	Polycarbonate UV-stabilised
Diffuser thickness	2mm
Class ISO 9223	C5
Operating temperature	-20° C / +50° C
Power	5W
Input power supply	Costant voltage 24V
Ballast	Remote
Insulation class	III Class
Dimmable	Yes
Cable type	FR5FOEM7-AD8 2x0,5 mm ²
Electrical connetion	Parallel
Idroskud® protection	Yes

Photometry




A25°

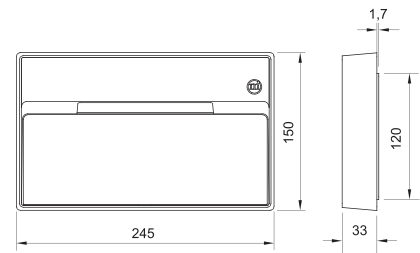

2.2

Source type	chip SMD
CCT	2700K 3000K 4000K
CRI	>90
Step MacAdam	3
Lumen output	up to 725 lm
Beam angle	A25°
Optical optional	None
Lifetime	L80 B10 50.000h
IP rating	IP65
IK rating	IK08
Type of finishing	Epoxy-polyester powder coating
Finishing colour	Anthracite RAL7016 Black RAL9005 Corten Green RAL6009 Paintable primer White RAL9003
Body material	Die-cast aluminum EN AB46100
Diffuser material	Polycarbonate UV-stabilised
Diffuser thickness	2mm
Class ISO 9223	C5
Operating temperature	-20° C / +50° C
Power	10W
Input power supply	Costant voltage 24V
Ballast	Remote
Insulation class	III Class
Dimmable	Yes
Cable type	FR5FOEM7-AD8 2x0,5 mm ²
Electrical connetion	Parallel
Idroskud® protection	Yes

Photometry



A25°



MIZAR
a brand of ReeR spa

Via Carcano, 32
10153 Turin - Italy

mizar.it
info@mizar.it