


AL30-IP CV

AL3012-IP	AL3624-IP	AL3048-IP	AL3012-IP	AL3024-IP	AL3048-IP
12V, 2.000mA	24V, 1.500mA	48V, 600mA	110-127V 12V, 1.200mA	110-127V 24V, 600mA	110-127V 48V, 300mA

PFC ATTIVO - ACTIVE PFC

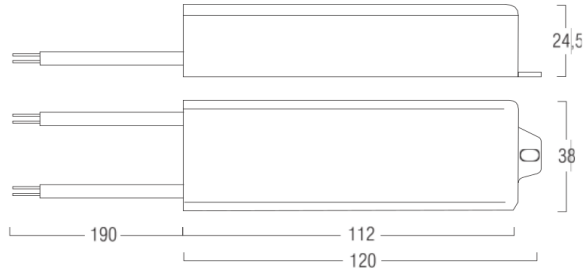

Imballo 20pz
Packaging 20 pcs

Tensione costante
Constant Voltage



	AL3012-IP	AL3624-IP	AL3048-IP	AL3012-IP	AL3024-IP	AL3048-IP
Tensione di alimentazione AC	220-240V	220-240V	220-240V	110-127V	110-127V	110-127V
Tensione di alimentazione DC	176-276V	176-276V	176-276V	-	-	-
Frequenza di alimentazione	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
Corrente di alimentazione	150 mA	220 mA	155 mA	185 mA	170 mA	165 mA
Potenza in ingresso	31W	40,9W	31W	17,8W	16,8W	16,4W
Fattore di potenza	0,90C-0,96	0,90C-0,96	0,90C-0,96	0,98	0,98	0,98
Rendimento massimo carico	83%	88%	90%	81%	86%	88%
Corrente di uscita	2.000mA	1.500mA	600mA	1.200 mA	600 mA	300mA
Tensione di uscita	12V	24V	48V	12V	24V	48V
Massima tensione a vuoto	14V	26V	50V	13V	26V	50V
Potenza di uscita	24W	36W	29W	14,4W	14,4W	14,4W
Temp. ambiente massima Ta	-25 ÷ 50° C	-25 ÷ 50° C	-25 ÷ 50° C	-25 ÷ 50° C	-25 ÷ 50° C	-25 ÷ 50° C
Temperatura max sul punto Tc	85°	85°	85°	85°	85°	85°
Peso	0,21 Kg	0,21 Kg	0,21 Kg	0,21 Kg	0,21 Kg	0,21 Kg
Mains voltage AC	220-240V	220-240V	220-240V	110-127V	110-127V	110-127V
Mains voltage DC	176-276V	176-276V	176-276V	-	-	-
Mains frequency	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
Mains current	150 mA	220 mA	155 mA	185 mA	170 mA	165 mA
Power in	31W	40,9W	31W	17,8 W	16,8W	16,4W
Power factor	0,90C-0,96	0,90C-0,96	0,90C-0,96	0,98	0,98	0,98
Efficiency full load	83%	88%	90%	81%	86 %	88%
Output current	2.000mA	1.200mA	600mA	1.200mA	600mA	300mA
Output voltage	12V	24V	48V	12V	24V	48V
Max output voltage	14V	26V	50V	13V	26V	50V
Output power	24W	29W	29W	14,4W	14,4W	14,4W
Ambient temperature Ta	-25 ÷ 50° C	-25 ÷ 50° C	-25 ÷ 50° C	-25 ÷ 50° C	-25 ÷ 50° C	-25 ÷ 50° C
Max case temperature on Tc	85°	85°	85°	85°	85°	85°
Weight	0, 21 Kg	0, 21 Kg	0, 21 Kg	0, 21 Kg	0, 21 Kg	0, 21 Kg

In rush current
5A 50µsec

- > Alimentatore indipendente
- > Rifasamento attivo
- > Versione a tensione costante per moduli LED
- > Ripple della tensione d'uscita per modelli in tensione < 5%
- > Grado di protezione, IP 67
- > Cavi H05RN-F, L. 190mm
- > Classe di isolamento, II
- > Protezione ai surge 4KV modo differenziale
- > Protezione al cortocircuito, sovraccarico, circuito aperto e termica
- > Durata nominale 50.000h a tc max
- > Conformità alle norme EN61347-2-13 EN61347-1, EN62384, EN55015, EN61000-3-2, EN61547
- > Independent driver
- > Active PFC
- > Constant voltage version for power LED
- > Typical ripple voltage for voltage models < 5%
- > Degree protection, IP 67
- > Cables H05RN-F, L. 190mm
- > Class II protection
- > Surge protection 4KV differential mode
- > Short circuit, overload, open circuit and thermal protection
- > Nominal life-time up to 50,000h at tc max
- > Complying with EN61347-2-13 EN61347-1, EN62384, EN55015, EN61000-3-2, EN61547

L'immagine del prodotto è puramente indicativa
The product image is indicative only