

# ELIOS 1.1 RGBW

ELIOS 1.1 13W AN7016 5° RGBW 24V  
PWM HC 1,5M

Cod: **ELS01PCS1G0C00**

**IdroSkud® protection system**

- polarity reversal protection
- voltage spikes protection
- water infiltration protection

**Protection class III**

Designed to be supplied from a separated extra-low voltage (SELV) power supply

**IP 66**

Protected against powerful power jets, 100 liters per minute

**IP 67**

Protected against temporary immersion (30 minutes) up to 1 meter

**IK 10**

Protected against impact of 20 J

**High temperatures**

Design to withstand temperatures up to +50°C

**C5 - Very high**

corrosion resistance level ISO 9223

**RGBW luminaire**

Light source allows to mix colours controlling four channels

**Mizar warranty**

5 years warranty



## Technical description

Floodlight suitable for outdoor environments (IP66/IP67), with operating temperature range: -20°C / +50°C. To reduce weight and ensure corrosion resistance, the body is made of aluminum. The aluminum body is protected by polyester epoxy paint to ensure corrosion resistance of 1500 hours in salt spray. The light source is a multi-chip LED RGBW powered by constant voltage 24V, for maximum power of 13W. The high luminous flux makes it ideal for marking pedestrian and driveway paths or illuminating facades and architectural details thanks to the optics with color-mixing TIR lens. The LED source is recessed for greater visual comfort. Elios is equipped with IdroSkud® system to protect electronic components from voltage spikes, polarity reversal and water infiltration. There are optionals for anti-glare (honeycomb) and accessory for installation in the ground (stake). The product must be combined with a power supply to ensure its operation. The power supply must be ordered separately. The amount of luminaires that can be connected to a single power supply varies depending on the type of installation. It is up to the installer to verify the possible voltage drop by evaluating the distance between the product and the power supply.

## Lighting data

Source type	multi-chip LED	Beam angle	5°
CCT	RGBW (4000K)	Photobiological risk	RG0
CRI	> 80	ULR	0.00%
MacAdam (SDCM)	3	BUG Rating	B0 U0 G0
Source lumen output (lm)	1142	CIE Flux Code	95 98 99 100 100
Luminaire lumen output (lm)	504	LED lifetime	L80 B10 50.000h
Light emission	Narrow		


## Mechanical data

Width (mm)	130	Body material	Anodized aluminum anticorodal 6082
Length (mm)	127	Diffuser material	Extraclear tempered glass
Height (mm)	160	Diffuser thickness (mm)	12
Weight (g)	2990	Class ISO 9223	C5
IP Rating	IP66 / IP67	Optic type	Technopolymer TIR Lens
IK rating	IK10	Optical optional	Honeycomb
Type of finishing	Protective primer followed by epoxy and polyester paint	Maximal working temperature	+50° C
Finishing colour	Anthracite RAL7016	Minimal working temperature	-20° C
Frame material	Anodized aluminum anticorodal 6082		


## Electrical data

Nominal power (W)	13	Electrical connection	Parallel connection
Power supply (input power type)	Costant voltage - 24V	Idroskud® protection	Yes
Ballast	Remote	Inverse polarity protection	Yes
Insulation class	III	Voltage spikes protection	Yes
Dimmable	Yes (PWM)		
Power cable type	FR5FOEM7-AD8 6x0,5 mm <sup>2</sup>		
Power cable length	1,5 m		

## Photometry

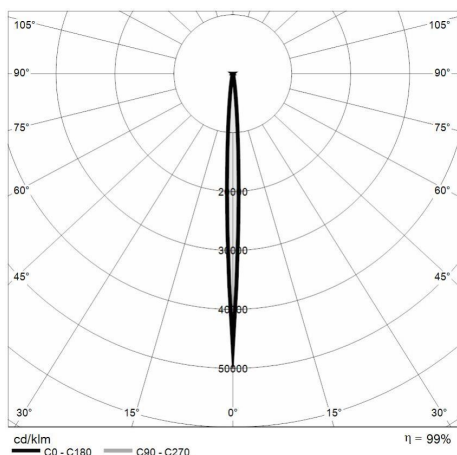

## Technical drawing

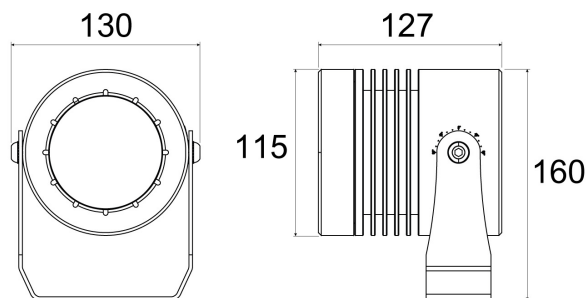

## Accessories



### GROUND STAKE

Stake for floodlight - big size

Cod: CEAZZ017



### NOT DIMMABLE POWER SUPPLY

Power supply DC 24V 14,4W IP67  
ON/OFF

Cod: MID0019



### NOT DIMMABLE POWER SUPPLY

Power supply DC 24V 36W IP67 ON/OFF

Cod: MID0020



### DIMMABLE POWER SUPPLY

Power supply 220/240 50/60Hz 24V  
24W IP67 DALI

Cod: MID0021



### RGBW CONTROL UNIT

Control unit WT5 5-channel RGBW  
PWM/WiFi

Cod: MID0023



### NOT DIMMABLE POWER SUPPLY

Power supply DC 24V 70W 2,9A IP67

Cod: MID0028



### NOT DIMMABLE POWER SUPPLY

Power supply DC 24V 150W 6,25A IP67

Cod: MID0029



### DIMMABLE POWER SUPPLY

Power supply DC 24V 120W 5A IP67  
DALI2/PWM

Cod: MID0030



**DIMMABLE POWER SUPPLY**

Power supply DC 24V 200W 5A IP67  
DALI2/PWM

Cod: MID0031



**RGBW REMOTE**

Remote control RGBW RT 1zone RF  
2.4GHz

Cod: MID1000



**RGBW TOUCH PANEL**

Touch wall panel RGBW 4 zone

Cod: MID1001