



# QUANTUM 2.2

QUANTUM 2.2 14W PRIMER 5° 3000K  
220V DALI

Cod: **QUA03DCS0PRZ01**



Protection class II  
Double insulated electrical appliance



IP 65  
Protected against water jets



IK 06  
Protected against impact of 1 J



High temperatures  
Design to withstand temperatures up to +50° C



C5 - Very high  
corrosion resistance level ISO 9223



DALI  
Luminaire with dimmable power-supply integrated



Customizable finishing  
The luminaire could be painted by final client



Mizar warranty  
5 years warranty



## Technical description

Double-emission fixture for wall mounting, suitable for outdoor environments (IP65), with wide operating temperature range: -20°C / +50°C. The body is made of die-cast aluminum protected by polyester epoxy paint to ensure corrosion resistance of 1500 hours in salt spray. The light source is a single 14W Power Led chip powered by 220Vac (integrated power supply). The luminous flux and distinctive design make it ideal for illuminating facades and architectural details. Color rendering index CRI > 90. Optional anti-glare (honeycomb) is provided.

## Lighting data

Source type	double chip power LED	Photobiological risk	RG0
CCT	3000K	ULR	50.00%
CRI	> 90	BUG Rating	B1 U3 G0
MacAdam (SDCM)	3	CIE Flux Code	90 96 99 50 100
Source lumen output (lm)	890	LED lifetime	L80 B10 50.000h
Luminaire lumen output (lm)	634	Efficiency class	This product contains a light source of energy efficiency class (EU2019/2015): G
Light emission	Narrow		
Beam angle	5°		


## Mechanical data

Width (mm)	78	Body material	Die-cast aluminum EN AB46100
Length (mm)	112	Diffuser material	Extraclear tempered glass
Height (mm)	235	Diffuser thickness (mm)	6
Weight (g)	1660	Class ISO 9223	C5
IP Rating	IP65	Optic type	Technopolymer TIR Lens
IK rating	IK06	Optical optional	None
Type of finishing	Paintable protective primer	Maximal working temperature	+50° C
Finishing colour	Paintable primer	Minimal working temperature	-20° C

## Electrical data

Nominal power (W)	14	Connector type	Class II terminal block
Power supply (input power type)	220V AC 50/60 Hz	Power cable length	Not pre-wired
Ballast	Integrated		
Insulation class	II		
Dimmable	Yes (DALI)		

## Photometry

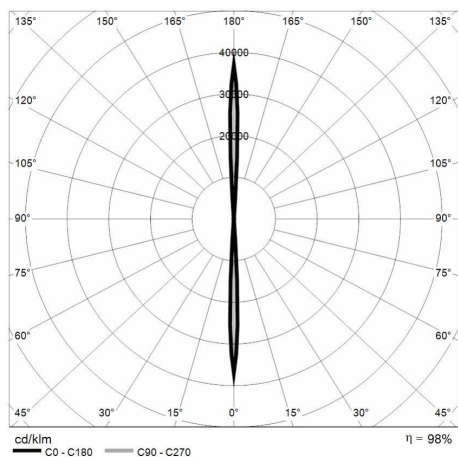

## Technical drawing

