

LAMINA 2.0

LAMINA 15.1 1499mm 39W OPAL RGBW
24V PWM 0,4M

Cod: **LMA03PBK000A00**



IdroSkud® protection system
polarity reversal protection +
voltage spikes protection + water
infiltration protection



Protection class III
Designed to be supplied from a
separated extra-low voltage
(SELV) power supply



IP 67
Protected against temporary
immersion (30 minutes) up to 1
meter



IP 66
Protected against powerful power
jets, 100 liters per minute



IK 10
Protected against impact of 20 J



High temperatures
Design to withstand temperatures
up to +50° C



Drive-over
Fixture design to withstand a static
load up to 200kg



CX - Extreme
corrosion resistance level ISO 9223



RGBW luminaire
Light source allows to mix colours
controlling four channels



Mizar warranty
5 years warranty



Technical description

LAMINA is a linear ingrounds range, drive-over, suitable for outdoor environments (IP66/IP67), with operating temperature range: -20°C / +50°C. The body is made of PMMA, transparent and opal on the upper side. The light source is LED SMD3014, powered at 24V in constant voltage. The luminous flux makes it ideal for marking pedestrian and driveway paths, or creating light cuts on floors, walls and ceilings. Color rendering index CRI > 80. Lineo is equipped with IdroSkud® system to protect electronic components from voltage spikes, polarity reversal and water infiltration. Installation accessories are provided (floor and plasterboard outercase; cable extensions up to 15 m). The product must be combined with a power supply to ensure its operation. The power supply must be ordered separately. The amount of luminaires that can be connected to a single power supply varies depending on the type of installation. It is up to the installer to verify the possible voltage drop by evaluating the distance between the product and the power supply.

MIZAR is a brand of REER SPA

Via Carcano 32 - 10153 - Torino, Italy

Tel: +39 011 9969833 - Mail: info@mizar.it - www.mizar.it

Lighting data

Source type	SMD chip 3014 + SMD chip	Photobiological risk	RG0
	3528	ULR	100,00%
CCT	RGBW (4000K)	BUG Rating	B0 U3 G0
CRI	> 80	CIE Flux Code	0 0 0 0 100
MacAdam (SDCM)	3	LED lifetime	L80 B10 50.000h
Source lumen output (lm)	2954	Efficiency class	This product contains a light source of energy efficiency class (EU2019/2015): E
Luminaire lumen output (lm)	620		
Light emission	Diffused		
Beam angle	120°		


Mechanical data

Width (mm)	18	Class ISO 9223	CX
Length (mm)	1499	Maximal working temperature	+50° C
Height (mm)	34.5	Minimal working temperature	-20° C
IP Rating	IP66 / IP67	Maximum static load (kg)	2000
IK rating	IK10	Walk-over	Yes
Finishing colour	Opal white	Drive-over	Yes
Body material	Trasparent PMMA	Maximal surface temperature	+50° C
Diffuser material	Opal PMMA	Areas EN 60598-2-13	A1 / A2 / A3 / A4

Electrical data

Nominal power (W)	39	Electrical connection	Parallel connection
Power supply (input power type)	Costant voltage - 24V DC	Idroskud® protection	Yes
Ballast	Remote	Inverse polarity protection	Yes
Insulation class	III	Voltage spikes protection	Yes
Dimmable	Yes		
Connector type	M12 - 5 poles IP67		
Power cable length	0,4 m		

Photometry

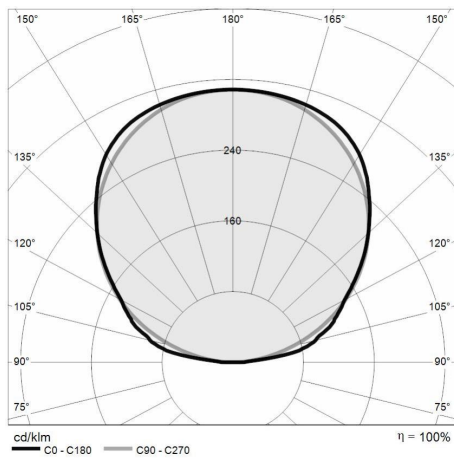

Technical drawing

