



# VITRUM 1.1

VITRUM 1.1 2W WHITE OPAL 3000K 24V  
5M

Cod: **VIT01DCD003H00**



#### IdroSkud® protection system

- polarity reversal protection
- voltage spikes protection
- water infiltration protection



#### Protection class III

Designed to be supplied from a separated extra-low voltage (SELV) power supply



#### IP 66

Protected against powerful power jets, 100 liters per minute



#### IP 68

Protected against continuous immersion up to 3 meters



#### IK 10

Protected against impact of 20 J



#### High temperatures

Design to withstand temperatures up to +50°C



#### Walk-over

Fixture design to withstand a static load up to 5 kN



#### CX - Extreme

corrosion resistance level ISO 9223



#### Mizar warranty

5 years warranty



## Technical description

Fully flush inground luminaire, walk-over, suitable for outdoor and underwater environments (IP66/IP68) with operating temperature range: -20°C / +50°C. Its special feature is that it has a tempered glass screen without metal frame, opal, with black screen-printed edge. The body is made of black anodized anticorrosive aluminum. The light source consists of a single 2W power Led chip powered at 24Vdc constant voltage with integrated driver. The minimalist design makes it ideal as a lighting fixture for elegant indoor and outdoor environments, as well as for high-humidity situations (spas, wine cellars). The source is set back for greater visual comfort. Color rendering index CRI > 90. Vitrum is equipped with IdroSkud® system to protect electronic components from voltage spikes, polarity reversal and water infiltration. There are installation accessories (draining, watertight and plasterboard outercase). The product must be combined with a power supply to ensure its operation. The power supply must be ordered separately. The amount of luminaires that can be connected to a single power supply varies depending on the type of installation. It is up to the installer to verify the possible voltage drop by evaluating the distance between the product and the power supply.

## Lighting data

|                             |                       |
|-----------------------------|-----------------------|
| Source type                 | single chip power LED |
| CCT                         | 3000K                 |
| CRI                         | > 90                  |
| MacAdam (SDCM)              | 2                     |
| Source lumen output (lm)    | 157                   |
| Luminaire lumen output (lm) | 61                    |
| Light emission              | Diffused              |
| Beam angle                  | 120°                  |

|                      |  |
|----------------------|--|
| Photobiological risk | RG0  |
| ULR                  | 100.00%  |
| BUG Rating           | B0 U3 G0   |
| CIE Flux Code        | 0 0 0 0 100  |
| LED lifetime         | L80 B10 50.000h  |
| Efficiency class     | This product contains a light source of energy efficiency class (EU2019/2015): F |

## Mechanical data

|                         |                                    |
|-------------------------|------------------------------------|
| Diameter (mm)           | 40                                 |
| Height (mm)             | 77                                 |
| Weight (g)              | 113                                |
| IP Rating               | IP66 / IP68                        |
| IK rating               | IK10                               |
| Finishing colour        | White silk-screen                  |
| Body material           | Anodized aluminum anticorodal 6082 |
| Diffuser material       | Extraclear satin tempered glass    |
| Diffuser thickness (mm) | 8                                  |
| Class ISO 9223          | CX                                 |


|                             |                        |
|-----------------------------|------------------------|
| Optic type                  | Technopolymer TIR Lens |
| Optical optional            | None                   |
| Maximal working temperature | +50° C                 |
| Minimal working temperature | -20° C                 |
| Maximal static load (kN)    | 5                      |
| Walk-over                   | Yes                    |
| Driver-over                 | No                     |
| Maximal surface temperature | +50° C                 |
| Areas EN 60598-2-13         | A1 / A2                |

## Electrical data

|                                 |                       |
|---------------------------------|-----------------------|
| Nominal power (W)               | 2                     |
| Power supply (input power type) | Costant voltage - 24V |
| Ballast                         | Remote                |
| Insulation class                | III                   |
| Dimmable                        | Yes                   |
| Power cable type                | H05RN - F 2x0,75 mm²  |
| Power cable length              | 5 m                   |

|                             |                     |
|-----------------------------|---------------------|
| Electrical connection       | Parallel connection |
| Idroskud® protection        | Yes                 |
| Inverse polarity protection | Yes                 |
| Voltage spikes protection   | Yes                 |

## Photometry

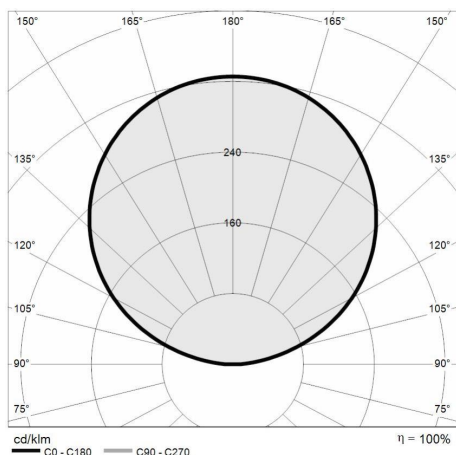

## Technical drawing



## Accessories



**DRAINING OUTERCASE**  
Outer case draining VITRUM 1

Cod: VITZZ000




**SLIM DRAINING OUTERCASE**  
Outer case slim VITRUM 1

Cod: VITZZ003



**PLASTERBOARD RING**  
Plasterboard ring VITRUM 1

Cod: VITZZ006



**EXTRACTION KIT**  
Suction cup for VITRUM 1

Cod: VITZZ009



**NOT DIMMABLE POWER SUPPLY**  
Power supply DC 24V 14,4W IP67  
ON/OFF

Cod: MID0019



**NOT DIMMABLE POWER SUPPLY**  
Power supply DC 24V 36W IP67 ON/OFF

Cod: MID0020



**DIMMABLE POWER SUPPLY**  
Power supply 220/240 50/60Hz 24V  
24W IP67 DALI

Cod: MID0021